

IEC-C7 Power Cord

K3762 Series




FEATURES

2-core light duty power cord as used on some small appliances.

Fitted with IEC-C7 (figure-8) connector and Australian 2-pin mains plug with insulated pins compliant with AS/NZS3112.

Electrical Safety Authority Approved.

DESIGN & CONSTRUCTION

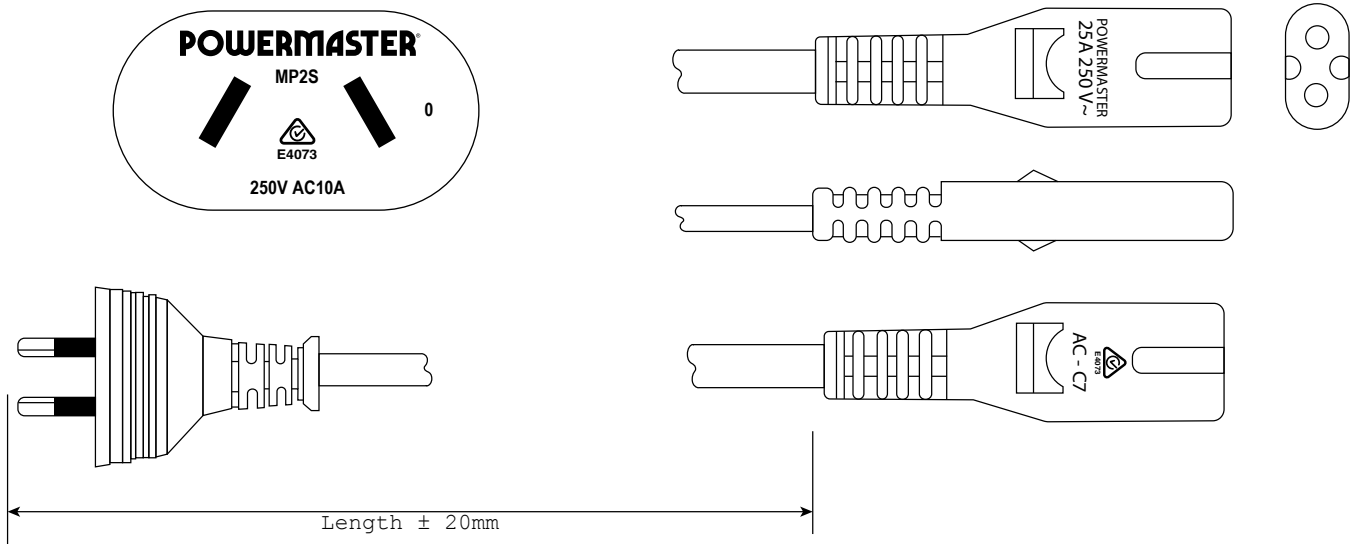

To view Access' extensive ranges go to: www.accesscomms.com.au

Sydney (Head Office)
Brisbane Sales
Melbourne Office
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147

28 The Gateway, Broadmeadows VIC 3047
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888
Phone: (07) 3308 5555
Phone: (03) 9330 8333
Phone: (08) 8338 5540

sales@accesscomms.com.au
brisbane@accesscomms.com.au
melbourne@accesscomms.com.au
adelaide@accesscomms.com.au

IEC-C7 Power Cord

K3762 Series


MAINS PLUG

Type	MP2 2-pin Australian mains plug
Standard	AS/NZS3112
Safety Certificate	ESO170089
Colour	Black

CONNECTOR

Type	IEC-C7
Standard	AS/NZS3109
Safety Certificate	N18158
Colour	Black

FLEX JACKET

Type	GD-2
Standard	AS/NZS3191
Safety Certificate	N18155
Marking	Powermaster® LD-2F 2x0.75mm ² 4V - 75 75°C LIGHT DUTY 250/250V  AS/NZS3191 C1
Diameter	5.5mm x 3.5mm
Material	PVC (Black, purple or white)

FLEX CONDUCTORS

Conductors	2 x 0.75mm ²
Sheath	PVC Brown (A), Blue (N)