

## Cat6 Solid Conductor U/UTP Cable

Y8500 Bulk Cable Series



### FEATURES


Now available in Reel In Box, with LSZH jacket, Datamaster's quality Cat6 Solid conductor cable uses only 100% bare copper. 4 twisted pairs 23AWG solid copper conductors.

Capable of performing up to 250MHz, ideal for broadband video transmission and gigabit Ethernet. The significant reduction in crosstalk results in a greater overall transmission speed. Available in 10 colours, with count down metre marking. Custom branding and colour also available.

The Cat6 cable is also POE++ compatible.

CAT#	COLOUR	LENGTH	PACKING
Y8500BLKRIB	Black	305 Metre	Reel-in-a-box
Y8500BLURIB	Blue	305 Metre	Reel-in-a-box
Y8500GRNRIB	Green	305 Metre	Reel-in-a-box
Y8500GRYRIB	Grey	305 Metre	Reel-in-a-box
Y8500ORARIB	Orange	305 Metre	Reel-in-a-box
Y8500PNKRIB	Pink	305 Metre	Reel-in-a-box
Y8500PURRIB	Purple	305 Metre	Reel-in-a-box
Y8500REDRIB	Red	305 Metre	Reel-in-a-box
Y8500WHIRIB	White	305 Metre	Reel-in-a-box
Y8500YELRIB	Yellow	305 Metre	Reel-in-a-box

### DESIGN & CONSTRUCTION

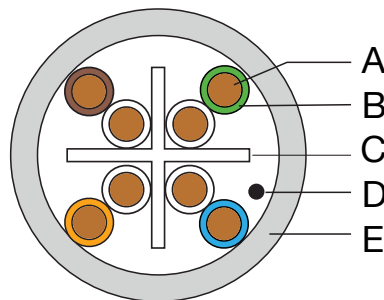

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Sales  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

sales@accesscomms.com.au  
brisbane@accesscomms.com.au  
melbourne@accesscomms.com.au  
adelaide@accesscomms.com.au

## Cat6 Solid Conductor U/UTP Cable

Y8500 Bulk Cable Series

Item	Description	Colour	Specification	Materials
A	Conductor		23 AWG 0.505mm ± 0.008mm	Bare Copper Solid
B	Insulation	Orange/White with Orange, Blue/White with Blue, Green/White with Green, Brown/White with Brown	Diameter 1.04mm	HDPE
C	Separator		4.4 x 4.4 mm	Polyethylene
D	Rip Cord			
E	Jacket		Thickness 0.6mm ± 0.1mm Diameter 6.0mm ± 0.20mm	LSZH

FREQUENCY (MHZ)	ATTENUATION (Max dB/100m)	NEXT (Min dB)	PS NEXT (Min dB)	IMPEDANCE (Ohm)
1	-	66.0	64.0	
4	3.8	65.3	63.3	
10	6.0	59.3	57.3	
16	7.6	56.2	54.2	
20	8.5	54.8	52.8	
31.25	10.7	51.9	49.9	
62.50	15.5	47.4	45.4	100 ± 15
100	19.9	44.3	42.3	
155	26.3	41.4	39.4	
200	29.2	39.8	37.8	
250	33.0	38.3	36.3	

### ELECTRICAL CHARACTERISTICS

Spark Test	1000V DC
Dielectric Strength	1000V DC for 3 seconds
Insulation Resistance	Min 150 MΩ-km at 20°C
Conductor Resistance	Max 7.91 Ω-100m at 20°C
Resistance Unbalance	Max 2%
Capacitance Unbalance	Max 330pF/100M
Mutual Capacitance	Max 5600pF/100M
NVP	70%
Temperature Rating	60°C
Voltage Rating	48V

### REGULATORY COMPLIANCE



Y8500 SERIES COMMUNICATION CABLE  
-UTP CAT6 ISO/IEC11801 & TIA/EIA - AS/CA  
S008

### CABLE MARKING

Y8500 SERIES (S3291A) COMMUNICATION CABLE -UTP CAT6  
ISO/IEC11801 & TIA/EIA

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

**Sydney (Head Office)**  
**Brisbane Sales**  
**Melbourne Office**  
**Adelaide Office**

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

[sales@accesscomms.com.au](mailto:sales@accesscomms.com.au)  
[brisbane@accesscomms.com.au](mailto:brisbane@accesscomms.com.au)  
[melbourne@accesscomms.com.au](mailto:melbourne@accesscomms.com.au)  
[adelaide@accesscomms.com.au](mailto:adelaide@accesscomms.com.au)